SYSTEM ROYAL

Rotating shoe stand

Components

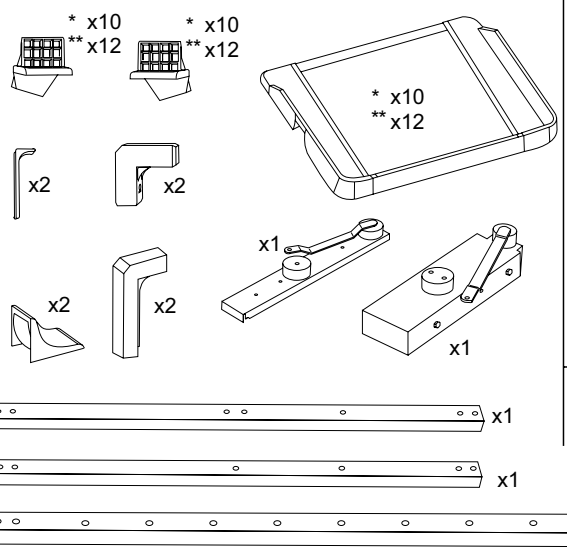

- x8 screw **ø4x20**
- x3 screw **M6x30**
- x2 screw **M5x40**
- x2 screw **M5x8**
- x12 screw **M4x8**
- x4 washer
- x2 plastic sleeve with flange
- x4 nut
- x1

Body dimensions

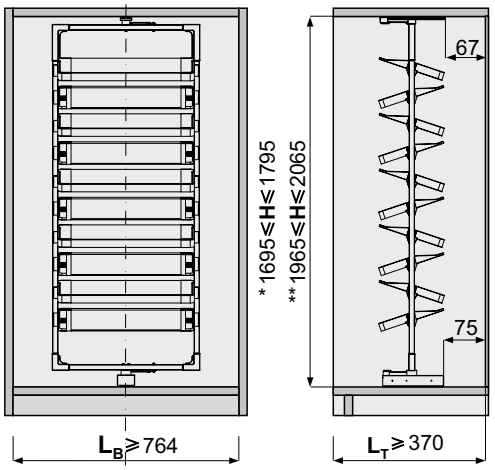

H - internal carcass segment height [mm]
L_T - internal carcass segment depth [mm]
L_B - internal carcass segment width [mm]

* - for a 10 shelf rotating shoe stand
** - for a 12 shelf rotating shoe stand

1. Installation of slides

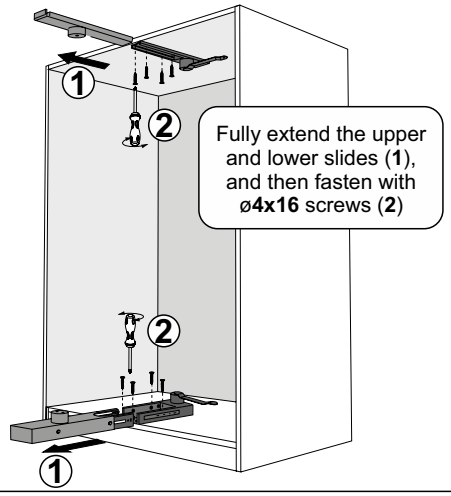

Fully extend the upper and lower slides (**1**), and then fasten with **ø4x16** screws (**2**)

Adjustment range 100 mm

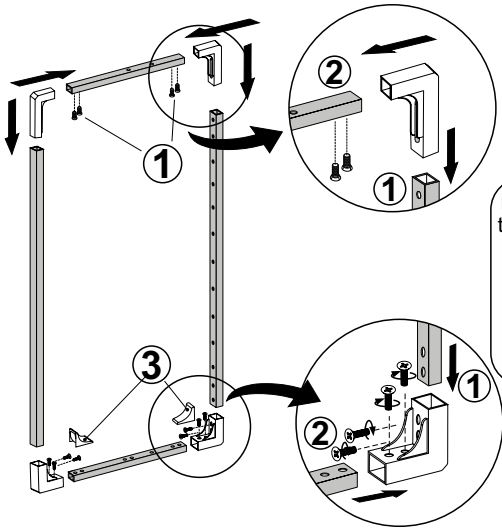

Insert the angle brackets to vertical profiles (**1**) and horizontal profiles (**2**) then secure with screws and fit cover caps (**3**). The stand frame has vertical adjustment of **±100 mm**

2. Installing stand frame on slides

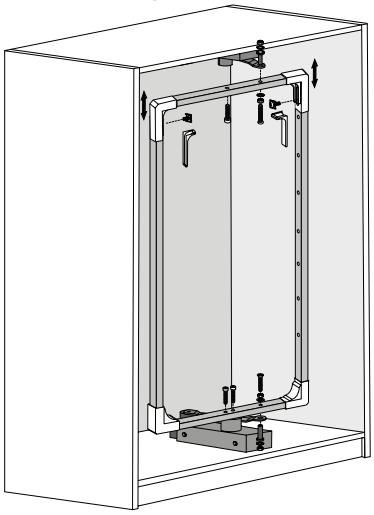

3. Installing the shelves

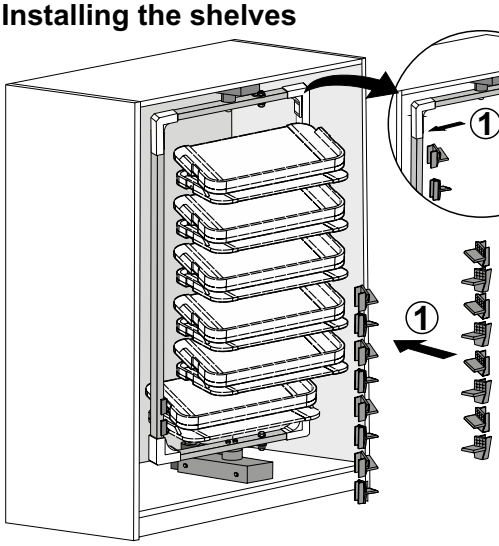

Insert the shelf brackets on the vertical profile holes (**1**), and then insert the shelves on the brackets (**2**). Remember to alternate the shelf stacks

SEVROLL