

COMPONENTS

Handle
L: 2.70 m

ALFA II C FAWORYT II C VICTORIA II C

Top track Gemini-Decor
L: 1.70 m, 2.35 m, 3.00 m, 4.05 m, 6.00 m

76 mm

Bottom track Gemini-Decor II
L: 1.70 m, 2.35 m, 3.00 m, 4.05 m, 6.00 m

53 mm


Guiding carriage Focus

Angle section
Mini 11 mm x 17 mm
L: 1.70 m, 2.35 m, 3.00 m
Alfa, Faworyt
K2-Decor
L: 1.70 m, 2.35 m, 3.00 m
Victoria

Bottom carriage WD18C HI-TEC


Bottom carriage WD18V HI-TEC

Stopper HI-TEC

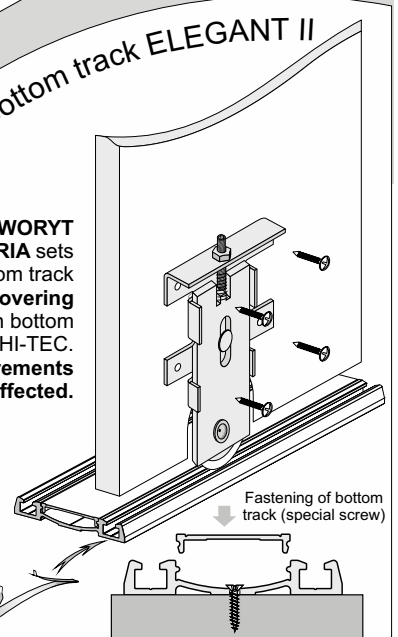



Dimensions of opening




Handle length = door height


	ALFA II C	VICTORIA II C	FAWORYT II C
	 anti-dust brush (self-adhesive) 6.7 mm x 13 mm textile door stop (inserted) 4.8 mm x 4 mm #16 / #18	 anti-dust brush (self-adhesive) 6.7 mm x 13 mm textile door stop (inserted) 4.8 mm x 4 mm #16 / #18	 anti-dust brush (self-adhesive) 6.7 mm x 13 mm textile door stop (inserted) 4.8 mm x 4 mm #16 / #18
door height - h	$h = H - 42 \text{ mm}$		$h = H - 42 \text{ mm}$
door wing height with soft-close fitted	Mini SV25/40/60 SV-25/50	$h = H - 42 \text{ mm}$	Mini SV25/40/60 SV-25/50 $h = H - 42 \text{ mm}$
	Top SV60/80, Central SV25/40	$h = H - 44 \text{ mm}$	Top SV60/80, Central SV25/40 $h = H - 44 \text{ mm}$
board height - hb	$hb = h - 2 \text{ mm}$		$hb = h - 2 \text{ mm}$
door width - w	$w = (W - 3 \text{ mm} + Z) : N$		$w = (W - 3 \text{ mm} + Z) : N$
board width #18 - wb	$wb = w - 22 \text{ mm}$		$wb = w - 19 \text{ mm}$
board width #12 - wb _m	$wb_m = w - 7 \text{ mm}$		$wb_m = w - 7 \text{ mm}$
angle section length - la	$la = dw - 48.4 \text{ mm}$		$la = w - 33.6 \text{ mm}$
mirror height - hm	$hm = hb - 4 \text{ mm}$		$hm = hb - 4 \text{ mm}$
mirror width - wm	$wm = wb_m - 20 \text{ mm}$		$wm = wb_m - 16 \text{ mm}$

number of doors - N	2	3	4	5	2	3	4	5
total overlap - Z	36 mm	72 mm	108 mm	144 mm	18 mm	36 mm	54 mm	72 mm


visual design – 4 wings		
	$w = (W - 3 + 108) : 4$	$w = (W - 3 + 54) : 4$
	$w = (W : 2 + 33) : 2$	$w = (W : 2 + 15) : 2$

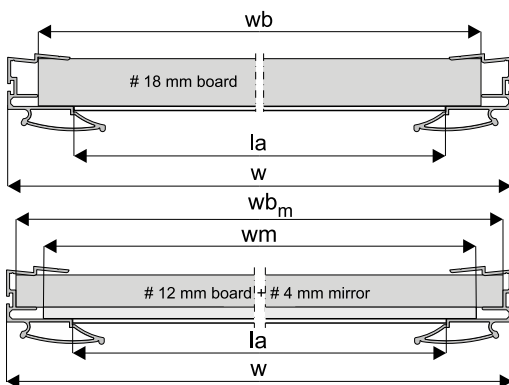

ALFA II C
VICTORIA II C
mirror dimensions

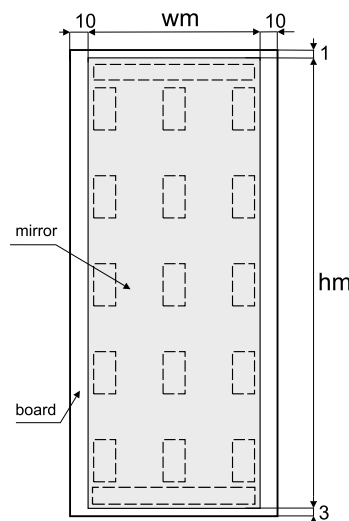

FAWORYT II C
mirror dimensions

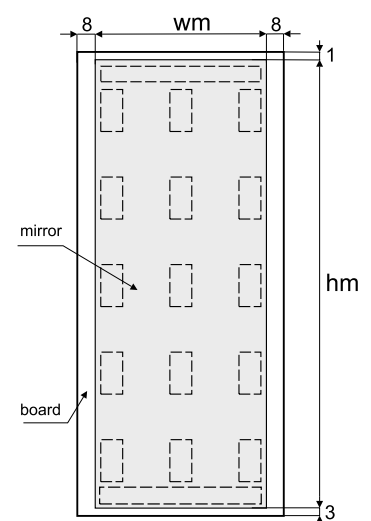

ATTENTION:
Board to mirror contact area should be free from dirt and grease before applying double-sided tape.

Broken line indicates recommended positioning of double-sided tape

ATTENTION!

Handle profile should be 2 mm longer than board height.


WARNING

SEVROLL does not bear any responsibility for deformation resulting from the application of improper quality of boards (improper storage, improper humidity)




VICTORIA II C, ALFA II C

Installation method for handle and guiding carriage with # 18 mm board

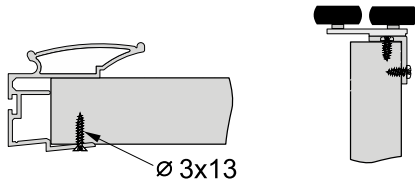

- When fitting handle profiles, do not use assembly adhesive
- The handle should be fixed to board with fastening screws $\text{Ø}3 \times 13$ on the inner door face

Installation method for handle and guiding carriage with # 12 mm board + # 4 mm mirror

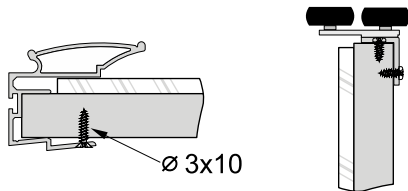


If the board or mirror is too loose on the handle profiles, screw the handles to the board using $\text{Ø}3 \times 10$ screws.

Screw are available from Sevroll-System


FAWORYT II C

Installation method for handle and guiding carriage with # 18 mm board

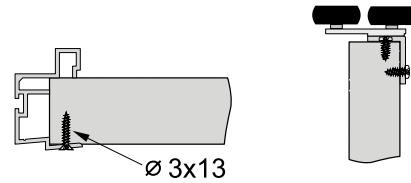

- When fitting handle profiles, do not use assembly adhesive
- The handle should be fixed to board with fastening screws $\text{Ø}3 \times 13$ on the inner door face

Installation method for handle and guiding carriage with # 12 mm board + # 4 mm mirror

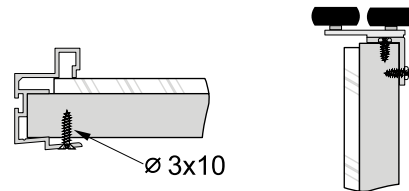


If the board or mirror is too loose on the handle profiles, screw the handles to the board using $\text{Ø}3 \times 10$ screws.

Screw are available from Sevroll-System


VICTORIA II C

Installation method for angle section K2-Decor





ALFA II C

Installation method for angle section MINI 11x17 mm




FAWORYT II C

Installation method for angle section MINI 11x17 mm

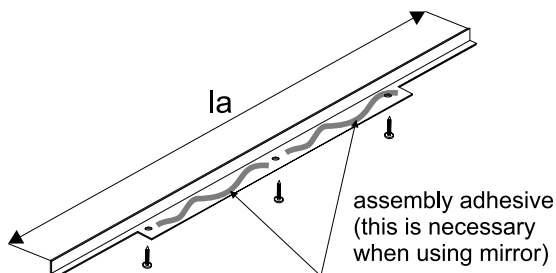

ATTENTION!

Angle section must be fastened to board with minimum 3 screws $\text{Ø}3 \times 25$.

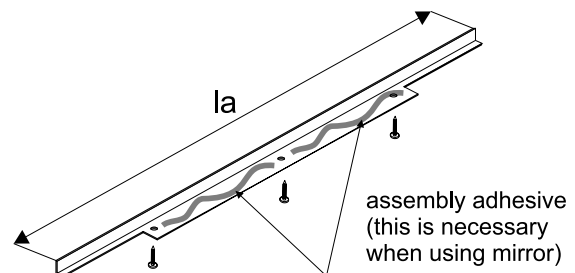

ATTENTION!

Angle section must be fastened to board with minimum 3 screws $\text{Ø}3 \times 25$.